




TECHNICAL DRAWINGS

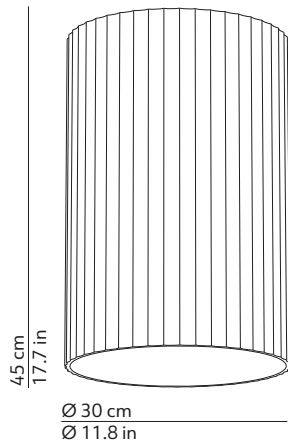

CODES

220-240 V

| | |
|----------|-------------|
| K396330S | white |
| K396330G | smokey grey |

120 V

| | |
|------------|-------------|
| K396330SUS | white |
| K396330GUS | smokey grey |

TECHNICAL DATA

| | |
|----------------------|-------------------|
| Light source type | Board LED |
| Lamp power | 1 x 27.5 W |
| Source luminous flux | 2250 lm |
| Colour temperature | 2700 K |
| CRI | >90 |
| Feeding | 220-240 V / 120 V |
| Dimmable | Phase cut |

PRODUCT INFORMATION

| | |
|--------------|-----------------|
| Installation | Ceiling |
| Net weight | 7.80 kg / 17.16 |

Structure

| | |
|----------|--------------|
| Colour | Black |
| Finish | Matte |
| Material | Coated metal |

Diffuser

| | |
|----------|----------------------|
| Colour | White |
| Finish | Sandblasted |
| Material | Textured blown glass |

| | |
|----------|----------------------|
| Colour | Smokey grey |
| Finish | Shiny |
| Material | Textured blown glass |

PACKAGING

Box 1

| | |
|----------------------|--|
| Structure | Structure |
| Dimensions L x W x H | 34.5 x 34.5 x 10 cm / 13.6 x 13.6 x 3.9 in |
| Volume | 0.012 m³ / 0.420 ft³ |
| Gross weight | 3 kg / 6.6 lbs |

Box 2

| | |
|----------------------|---|
| Diffuser | Diffuser |
| Dimensions L x W x H | 36.5 x 36.5 x 50 cm / 14.4 x 14.4 x 19.7 in |
| Volume | 0.067 m³ / 2.352 ft³ |
| Gross weight | 6 kg / 13.2 lbs |